


Technical sheet :

ES 616 LI



| Technical characteristics | | | Metric |
|---------------------------|---|-----------|--------------------------|
| 1.1 | Manufacturer | | Manitou |
| 1.2 | Model Name | | ES 616 LI |
| 1.3 | Power source | | Battery |
| 1.4 | Operator type | | Pedestrian |
| 1.5 | Max. capacity | Q | 1600 kg |
| 1.6 | Load centre of gravity | c | 600 mm |
| 1.8 | Distance from Load backrest to center of rear axle | x | 848 mm |
| 1.9 | Wheelbase | y | 1492 mm |
| Weight | | | |
| 2.1 | Service weight | | 1327 kg |
| 2.2 | Weight on front axle (laden) / rear axle (laden) | | 1246 kg / 1670 kg |
| 2.3 | Weight on front axle (Unladen) / rear axle (Unladen) | | 1033 kg / 290 kg |
| Wheels | | | |
| 3.1 | Tyres type | | Bandage |
| 3.5.2 | Number of drive wheels / Size of drive wheels | | 1x230x70 |
| 3.3 | Number of load wheels / Size of load wheels | | 2 / 140x60 |
| 3.4 | Number of stabilizer wheels / Size of the stabilizer wheels | | 1 / 140x60 |
| 3.5 | Number of front wheels / rear wheels | | 2 / 4 |
| 3.6 | Front wheel gauge | b10 | 529 mm |
| 3.7 | Rear wheel gauge | b11 | 380 mm |
| Dimensions | | | |
| 4.9 | Height tiller up min. / max. | h14 / h14 | 750 mm / 1250 mm |
| 4.15 | Fork height in low position | h13 | 86 mm |
| 4.19 | Overall length | l1 | 2174 mm |
| 4.20 | Length to face of forks | l2 | 976 mm |
| 4.21 | Overall width | b1 | 800 mm |
| 4.22 | Forks section / width / length | s / e / l | 60 mm / 185 mm / 1190 mm |
| 4.24 | Fork carriage width | b3 | 700 mm |
| 4.32 | Ground clearance at centre of wheelbase | m2 | 30 mm |
| 4.35 | Turning radius | Wa | 1588 mm |
| Performances | | | |
| 5.1 | Travel speed (laden / unladen) | | 6 km/h / 6 km/h |
| 5.2 | Lifting speed (laden / unladen) | | 0.18 m/s / 0.30 m/s |
| 5.3 | Lowering speed (laden / unladen) | | 0.27 m/s / 0.22 m/s |
| 5.10 | Service brake | | Electro magnetic |
| Engine | | | |
| 6.1 | Drive motor rating S2 60 min | | 1.50 kW |
| 6.2 | Lift motor rating at S3 15% | | 3 kW |
| 6.3 | Battery according to DIN 43531/35/36 A, B, C | | DIN 43535-B |
| 6.4 | Battery / Batteries capacity | | 24 V / 180 Ah |
| 6.5 | Battery weight (+/- 5%) | | 189 kg |
| Miscellaneous | | | |
| 8.1 | Type of drive control | | AC |
| 8.4 | Sound level at the driver's ear according to DIN 12 053 | | 65 dB(A) |

ES 616 LI - Dimensional drawing

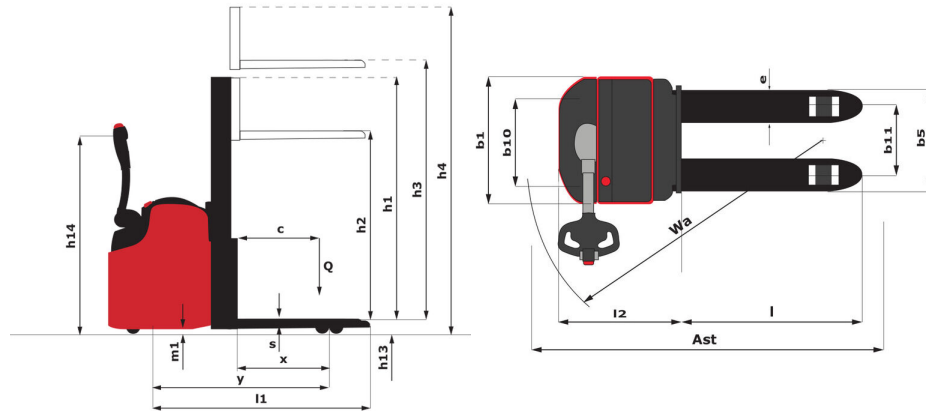


Characteristics of masts and residual capacities

| Central Cylinder Simplex | | CCS 15 | CCS 17 |
|---|----|---------|---------|
| h3 - Mast lifting height * | mm | 2935 | 2935 |
| h1 - Mast height lowered | mm | 1953 | 1953 |
| h4 - Mast height extended | mm | 3390000 | 3390000 |
| Residual capacity without attachment (Industrial load chart) | kg | 1600 | 1600 |

| Full Visibility Duplex | | FVD 29 | FVD 34 | FVD 38 |
|---|----|---------|---------|---------|
| h3 - Mast lifting height * | mm | 2935 | 2935 | 2935 |
| h1 - Mast height lowered | mm | 1953 | 1953 | 1953 |
| h4 - Mast height extended | mm | 3390000 | 3390000 | 3390000 |
| Residual capacity without attachment (Industrial load chart) | kg | 1300 | 1000 | 700 |

| Free Lift Duplex | | FLD 29 | FLD 34 |
|---|----|---------|---------|
| h3 - Mast lifting height * | mm | 2935 | 2935 |
| h1 - Mast height lowered | mm | 1953 | 1953 |
| h4 - Mast height extended | mm | 3390000 | 3390000 |
| Residual capacity without attachment (Industrial load chart) | kg | 1300 | 1000 |

| Free Lift Triplex | | FLT 42 | FLT 47 | FLT 54 |
|---|----|---------|---------|---------|
| h3 - Mast lifting height * | mm | 2935 | 2935 | 2935 |
| h1 - Mast height lowered | mm | 1953 | 1953 | 1953 |
| h4 - Mast height extended | mm | 3390000 | 3390000 | 3390000 |
| Residual capacity without attachment (Industrial load chart) | kg | 600 | 470 | 450 |

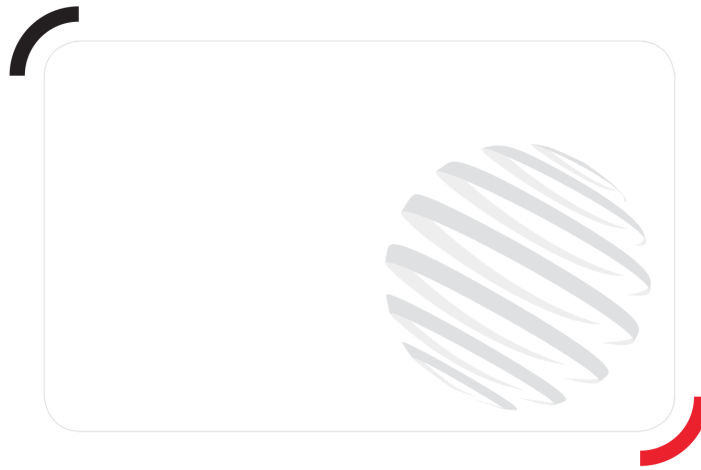

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes